

### Features :

#### One touch and easy operation

Turn the power on and you are ready to strap your packages. Motor stops automatically when not in use within preset 60 seconds to save energy and prolonged motor life.

#### Advanced P.C.B. control system

New easy-to-replace printed circuit board (PCB), controls feeding, tensioning, welding, sealing, and cooling of strap welds as well as other functions of the machine for trouble-free and low-cost operations.

#### Perfect welding heater plate

One-piece die-cast nickel steel heater plate completely eliminates heater blade problems associated with other older style heater elements.

#### Quality electromagnetic clutch transmission


Durable electro-magnetic clutch transmission increase motor life, strapping speed and reduces overall machine noise.

#### Top safety concern

Safe 24VDC electrical control eliminates possibilities of electrical shock.

### Specifications

Model	207
Power supply	1Ø, 220V, 50HZ
Driving motor	1/4HP. 220V 200W
Strap width	6-15mm
Dimensions	L910mm x W580mm x H730mm
Strapping speed	1.5 sec/strap
Min. package size	60mm
Max. package size	Any size
Weight	100 kg
Sealing method	Heat sealing

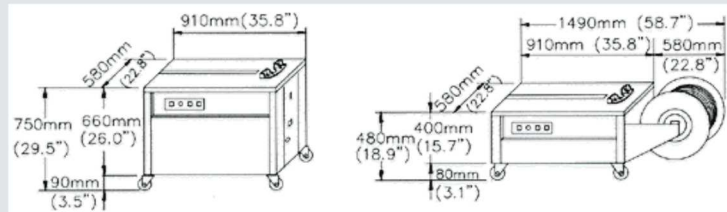

## Carton Sealing Machine

### Specifications

Power supply	1Ø, 220V, 50HZ
Tape width	2" (3" optional)
Sealing speed	20M/min
Case range	L150~T, W200~500, H120~500mm
Weight	150 kgs
Dimensions	L1200mm x W790mm x H1435~1775mm

Top and bottom drive ensures perfect packing even for bulging, light, heavy and high cartons.



## Ally Packaging Systems Pvt. Ltd.

35/1, Allypack House, Near Khedekar Industrial Estate,  
Katraj - Dhayri Road., Narhegaon, Pune-411041  
E-mail: allypack@vsnl.net Web: www.allypack.com

### Contact:

+91 98221 07676  
+91 96043 09309

Dealer Stamp